



Rubber expansion joint PN16 NBR PN16 with flange, 130 mm installation length

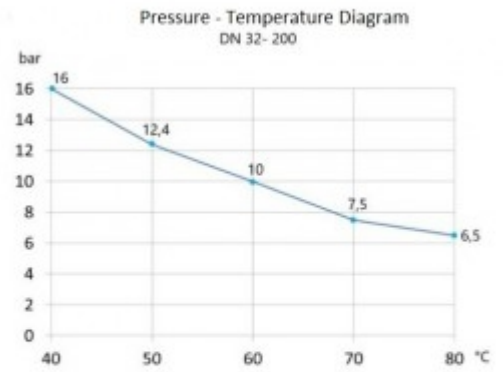

Technical specifications:

It is suitable for compansion, vibration and shock absorption in the rigid tube system.

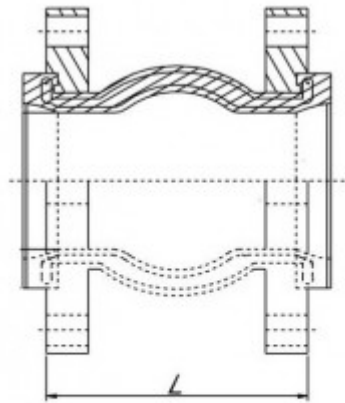

Compansion



Expansion



Lateral movement



Angular movement

Heat resistance: -10°C/+80°C

Medium: hydrocarbon , air, oil

Material: NBR, oil resistant

Installation length: 130 mm

Flanges: DN 30 - DN 150 PN16 (according to EN1092), DN 200 PN10 (according to EN1092)

Flange material: galvanized steel

On stock at the manufacturer, short delivery time with regular shipments

| DN | Compansion (mm) | Expansion (mm) | Lateral (mm) | Angular | Operating pressure (bar) | Article number |
|-----|-----------------|----------------|--------------|---------|--------------------------|----------------|
| 32 | 12 | 10 | 12 | 15° | 16 | 755073 |
| 40 | 12 | 10 | 12 | 15° | 16 | 755074 |
| 50 | 12 | 10 | 12 | 15° | 16 | 755106 |
| 65 | 12 | 10 | 12 | 15° | 16 | 755075 |
| 80 | 12 | 10 | 12 | 15° | 16 | 755108 |
| 100 | 12 | 10 | 12 | 15° | 16 | 755048 |
| 125 | 12 | 10 | 12 | 15° | 16 | 755049 |
| 150 | 12 | 10 | 12 | 15° | 16 | 755076 |

| DN | Compansion (mm) | Expansion (mm) | Lateral (mm) | Angular | Operating pressure (bar) | Article number |
|-----|-----------------|----------------|--------------|---------|--------------------------|----------------|
| 200 | 12 | 10 | 12 | 15° | 10 | 755107 |